

scanfill

SCANFILL FOIL rPP


Scanfill Foil rPP, based on recycled raw material, is a mineral reinforced thermoforming foil with excellent forming properties, forms faster and better than PP and is available in all colors.

The minerals and the recycled material significantly lowers the CO2 emissions and adds an exclusive soft-touch.

The material is suitable skin pack system using a FFS or thermoforming machine.

Suitable for various applications and segments, e.g. electrical components, industrial applications and secondary packaging.

The Scanfill Foil rPP material (PP) is recyclable and the material group with the highest demand on the recycling market.

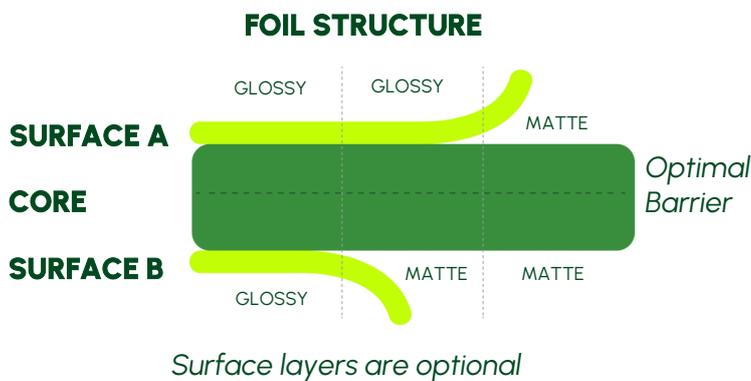

Stored at 10-35°C with relative humidity at 30-70%. Material needs to be protected from sunlight and physical contamination. Material can be stored up to 12 months under normal storage conditions.

PRODUCT DESCRIPTION

Foil thickness	170-1200 µm
Foil width	up to 1400 mm
Density	0,9-1,4 g/cm ³
Mineral content	up to 52%
Sealing temperature	165-200°C
Sealing time	0,5-2s
Shrinkage	0,8-1,5%
CO₂ savings	up to 68%
% recycled material	up to 100%

THERMOFORMING SETTINGS

Pre-heating cabinet	≈ 80°C
Foil temperature	≈ 140-160°C

FEATURES

 Recyclable

OPTIONS

 Barrier (Low, Standard, High)

 ESD

 Easy Seal

APPEARANCE

 Colored

 Dual colors

 Carbon black free color

 Matte or Glossy surface

Address

Bronsgatan 8
271 39 Ystad
Sweden

Contact

+46 (0)411 170 30
www.scanfill.com
scanfill@scanfill.se