

# scanfill

## SCANFOIL PS


Scanfoil PS is a thermoplastic foil with good forming properties, transparent and available in various colors.

The material is suitable for thermoformed packaging applications. The snapping effect makes it suitable for break-off applications such as multi-packs. Scanfoil PS is also available in a high impact version, both transparent and in various colors.

Scanfoil PS has good electrical insulation properties, is food approved, and has high hardness and high surface gloss.

The material is recyclable, and can be reused in the production of new foil.

### FOIL STRUCTURE

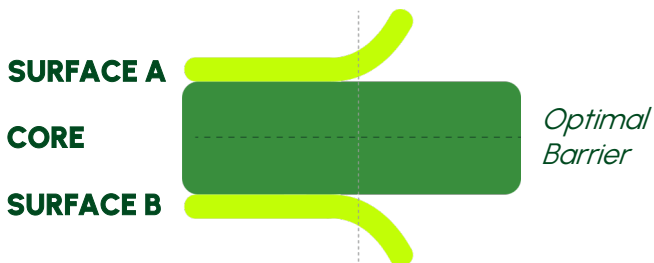

*Surface layers are optional*

Stored at 10-35°C with relative humidity at 30-70%. Material needs to be protected from sunlight and physical contamination. Material can be stored up to 12 months under normal storage conditions.

### PRODUCT DESCRIPTION

<b>Foil thickness</b>	350-1500 µm
<b>Foil width</b>	up to 900 mm
<b>Density</b>	1,04-1,06 g/cm <sup>3</sup>
<b>Shrinkage</b>	0,2-0,6%
<b>% recycled material</b>	up to 100%
<b>Glass transition temp. (Tg)</b>	≈ 100°C





### THERMOFORMING SETTINGS

<b>Pre-heating cabinet</b>	-
<b>Foil temperature</b>	≈ 120-180°C




### FEATURES

-  Food approved
-  Freezable
-  Recyclable

### OPTIONS

-  Anti-Fog
-  Anti-Block
-  ESD
-  Easy Seal

### APPEARANCE

-  Clear
-  Colored
-  Carbon black free color

### Address

Bronsgatan 8  
271 39 Ystad  
Sweden

### Contact

+46 (0)411 170 30  
[www.scanfill.com](http://www.scanfill.com)  
[scanfill@scanfill.se](mailto:scanfill@scanfill.se)